


YXR1004

D RING WITH STRAP, TYPE A

ITEM NO.	SIZE (IN.)	MBS (LBS.)	WEIGHT (LBS.)	DIMENSIONS (MM)						
				A	B	C	D	E	F	G
YXR1004-01	3/8	3000	0.81	51	68	9.5	51	20	6	15
YXR1004-02	1/2	12000	0.94	63.5	57.1	13	45	25	8	33
YXR1004-03	5/8	18000	1.87	75	75	16	63.5	31	9.5	37
YXR1004-04	3/4	26500	2.70	75	75	19	63.5	35	9.5	40
YXR1004-05	1	47000	4.21	75	75	25	63.5	41	9.5	63
YXR1004-06	1	47000	4.74	100	75	25	63.5	41	9.5	63

◆ Ultimate Load at 4 Times the Working Load Limit.

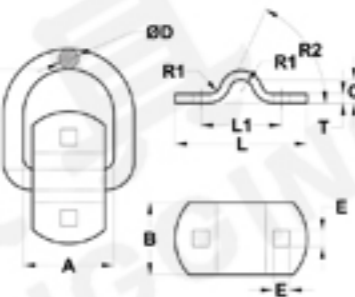


YXR1014

D RING WITH STRAP (RECTANGULAR HOLES), TYPE A

ITEM NO.	SIZE (IN.)	MBS (LBS.)	WEIGHT (LBS.)	DIMENSIONS (MM)										
				A	B	C	D	E	H	L	L1	R1	R2	T
YXR1014-01	1/2	12000	1.1	57.1	45	12	13	10	63.5	72.5	45	6°	65°	4.5

◆ Ultimate Load at 4 Times the Working Load Limit.

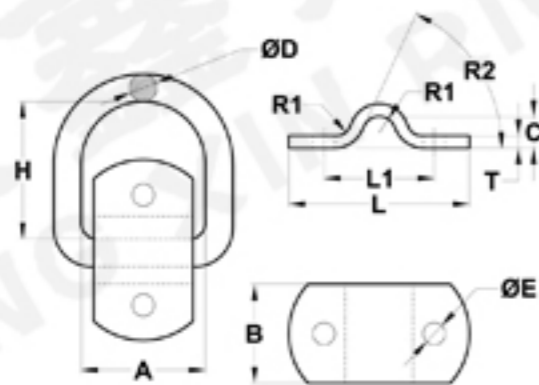


YXR1015

D RING WITH STRAP (ROUND HOLES), TYPE A

ITEM NO.	SIZE (IN.)	MBS (LBS.)	WEIGHT (LBS.)	DIMENSIONS (MM)										
				A	B	C	D	E	H	L	L1	R1	R2	T
YXR1015-01	1/2	12000	1.1	57.1	45	12	13	10	63.5	72.5	45	6°	65°	4.5

◆ Ultimate Load at 4 Times the Working Load Limit.

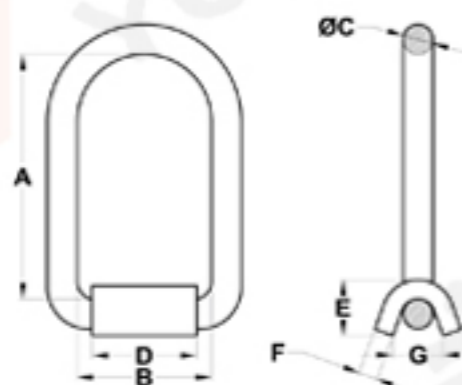

YXR1017

D RING WITH STRAP, TYPE A (1/2" WLL 11000 LBS)

ITEM NO.	SIZE	MBS (T)	WEIGHT (LBS.)	DIMENSIONS (MM)						
				A	B	C	D	E	F	G
YXR1017-01	1/2	11000	0.53	115	65	13	45	25	8	33

◆ Ultimate Load at 4 Times the Working Load Limit.